


1.

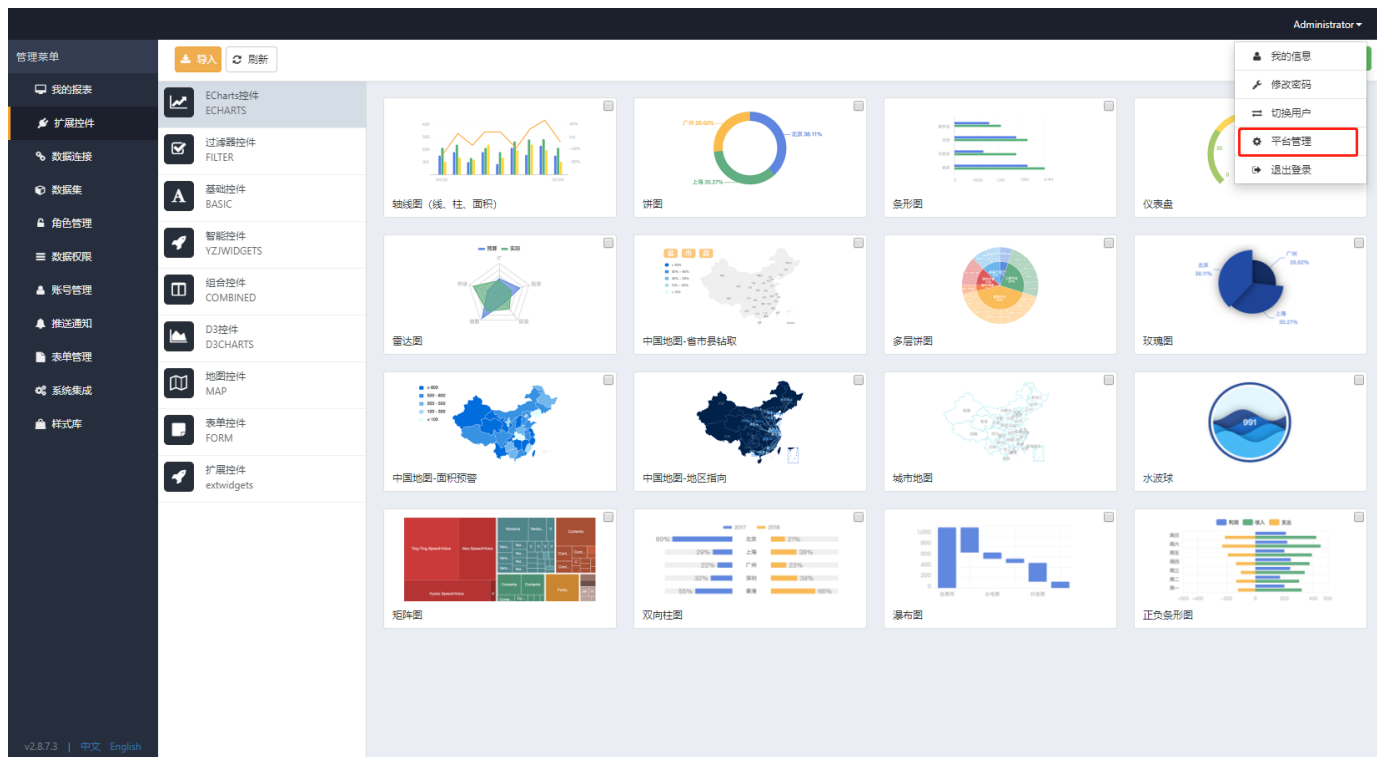

2.

The screenshot shows the '系统设置' (System Settings) page. The sidebar on the left has '系统设置' highlighted with a red box. The main content area contains various settings: '全局报表页脚本' (Global Report Page Script) set to '关闭' (Off); '自动备份' (Auto Backup) set to '开启' (On) with a sub-menu showing '备份间隔' (Backup Interval) of 24 hours, '备份文件保留' (Backup File Retention) of 7 days, and '备份目录' (Backup Directory) as 'F:\bak\平台备份'; '自定义CDN' (Custom CDN) set to '关闭' (Off); '客户端报表目录树' (Client Report Directory Tree) set to '关闭' (Off); '全局联系人列表' (Global Contact List) set to '关闭' (Off); '报表刷新日志' (Report Refresh Log) set to '开启' (On) and highlighted with a red box; '停止报表刷新时间段' (Stop Report Refresh Time Period) with a warning icon; '报表刷新最小间隔 (分钟)' (Report Refresh Minimum Interval (Minutes)) set to 1 with a warning icon; '自动清理用户日志' (Auto Clean User Logs) set to '关闭' (Off); '报表统计代码' (Report Statistics Code) with a text area containing '可在网页报表中嵌入第三方统计代码'; '禁用系统集或登录界面' (Disable System Integration or Login Interface) set to '关闭' (Off) with a warning icon; '禁用微信登录界面' (Disable WeChat Login Interface) set to '关闭' (Off) with a warning icon; '用户登录脚本' (User Login Script) set to '关闭' (Off); '数据权限脚本' (Data Permissions Script) set to '关闭' (Off); and '自定义查看报表SSO' (Custom View Report SSO) set to '关闭' (Off).

The screenshot displays a web-based management interface. On the left is a vertical sidebar menu with icons and labels for various functions: 用户管理 (User Management), 报表管理 (Report Management), 报表刷新管理 (Report Refresh Management), 报表评论管理 (Report Comment Management), 用户日志 (User Log - highlighted with a red box), 系统日志 (System Log), 系统设置 (System Settings), 安全设置 (Security Settings), 邮件服务器 (Email Server), 接口插件 (Interface Plugin), and 许可证 (License). The main area at the top has a blue header bar containing the title '用户日志' (User Log) and three action buttons: '清除' (Clear), '导出' (Export), and '同步导出' (Sync Export). Below the header is a large table with columns: '姓名' (Name), '行为' (Action), '内容' (Content), '请求IP' (Request IP), '服务器节点' (Server Node), and '日期' (Date). The first five rows of the table are enclosed in a red rectangular border. These rows show actions performed by 'Administrator' users, such as '报表数据刷新' (Refresh report data) and '报表渲染' (Render report), with associated details like '采购模块 (271726)' and links to '查看详情' (View details). The remaining rows show similar actions without the red border.

姓名	行为	内容	请求IP	服务器节点	日期
Administrator	报表数据刷新	采购模块 (271726) 查看详情	192.168.6.2	192.168.6.2	6小时前
Administrator	报表数据刷新	... 查看详情	192.168.6.2	192.168.6.2	6小时前
Administrator	报表数据刷新	... 查看详情	192.168.6.2	192.168.6.2	6小时前
Administrator	报表数据刷新	... 查看详情	192.168.6.2	192.168.6.2	6小时前
Administrator	报表数据刷新	... 查看详情	192.168.6.2	192.168.6.2	6小时前
Administrator	报表渲染	...	192.168.6.2	192.168.6.2	19小时前
Administrator	报表停留	...	192.168.6.2	192.168.6.2	19小时前
Administrator	报表渲染	...	192.168.6.2	192.168.6.2	19小时前
Administrator	报表停留	...	192.168.6.2	192.168.6.2	19小时前
Administrator	报表渲染	...	192.168.6.2	192.168.6.2	19小时前
Administrator	报表停留	...	192.168.6.2	192.168.6.2	19小时前
Administrator	报表渲染	...	192.168.6.2	192.168.6.2	19小时前
Administrator	报表停留	...	192.168.6.2	192.168.6.2	19小时前
Administrator	报表渲染	...	192.168.6.2	192.168.6.2	19小时前
Administrator	报表停留	...	192.168.6.2	192.168.6.2	19小时前
Administrator	报表渲染	...	192.168.6.2	192.168.6.2	1天前
Administrator	报表停留	...	192.168.6.2	192.168.6.2	1天前
Administrator	报表渲染	...	192.168.6.2	192.168.6.2	1天前

